


SSI TC-HD-1000M Kiosk NETWORK CONFIGURATION

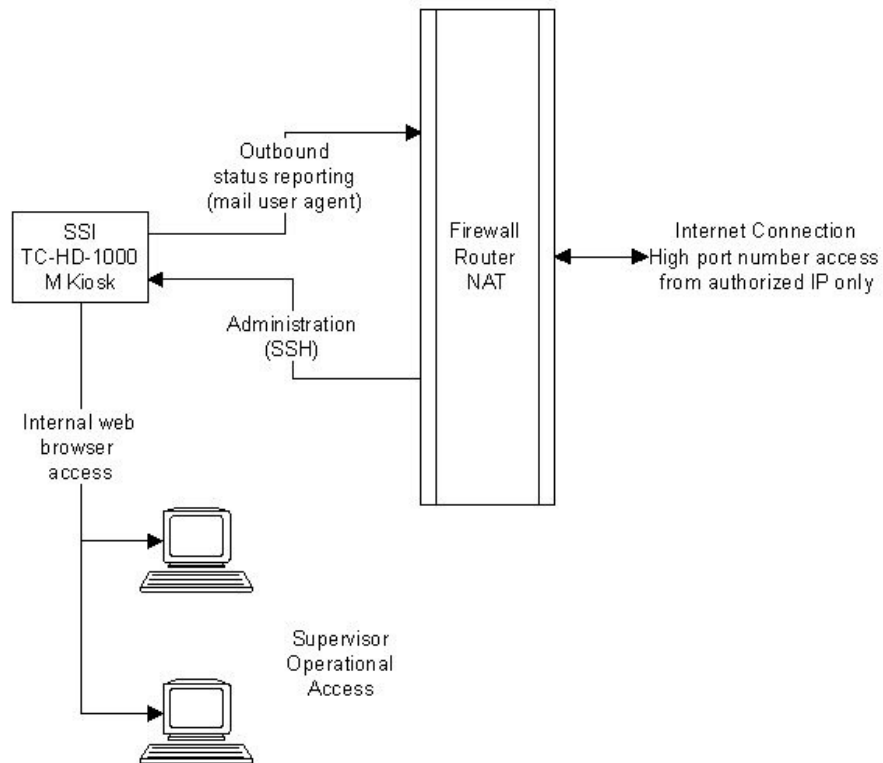

- End Users access the kiosk using a Web Browser connection.
- All Kiosks run a second internal firewall to ensure authorized-only PC access to the system within the local area network, in addition to user / password authentication.
- Remote administration of the kiosk is carried out (e.g. by SkillSense support personnel) using secure shell access. Note: this may be accessed from a high (not well-known) port number at the Firewall / NAT layer
- The Master Kiosk (M Series) sends log analysis reports for security monitoring to SkillSense support personnel by email (using a basic mail user agent).
- The Slave Kiosk (S series) also sends and receives configuration information as a client using the HTTP(S) protocol